

# 125mm BATHROOM FAN KITS

# & 150mm

## HIGH STEAM BATHROOM & KITCHEN FAN KITS



Quiet fan kits range includes  
**HUMIDITY CONTROL MODELS**

Model	Standard Switching	Timer Switching	Humidity Control
125mm Through Wall Fan Kits	FAN7187	FAN7188	FAN7189
150mm Through Wall Fan Kits	FAN7190	FAN7191	FAN7192

The new high-pressure and energy-efficient QUIET fan kits have ultra-high airflow without nuisance noise and are designed to be ducted straight through a bathroom or kitchen exterior wall. All kits include a weatherproof cowl. 5 year warranty.

Designer Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Order Code
					(l/s)	(m <sup>3</sup> /hr)				
	150	Axial	22	138	114	410	0.19	41	Standard	FAN7190
									Timer	FAN7191
									Humidity Control	FAN7192
	125	Axial	15	68	54	194	0.28	38	Standard	FAN7187
									Timer	FAN7188
									Humidity Control	FAN7189

*Note: Installed system performance is always influenced by duct length and layout*

### Switching Options


**Standard** Remote switch (not supplied).

**Timer** Remote switch (not supplied). Fan continues operating for preset time after switching off. Timers are 2-30 minute adjustable and require permanent and switched phase.

**Humidity** Remote switch (not supplied). The humidity control models come with an advanced inbuilt humidity automation controller.

### Dimensions (mm)

Model	Cut-Out Size	A	B	C	D	E	F	G	H
FAN7190 FAN7191 FAN7192	168	174	30	150	375	146	111	30.5	227
FAN7187 FAN7188 FAN7189	140	160	30	125	375	120	100	29	185

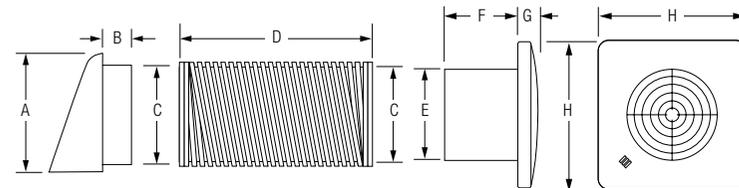

### Technical

<b>Supply</b>	220-240V AC, 50Hz
<b>Max. Operating Temp</b>	40°C
<b>IP Rating</b>	IPX4
<b>Exterior Grille</b>	Weatherproof Cowl
<b>Duct</b>	Aluminium Semi-Rigid
<b>Duct Length</b>	375mm